

# FAA Initiative to Address Noise Concerns of Santa Cruz/Santa Clara/San Mateo/San Francisco Counties

FAA & Select Committee  
Working Meeting

July 15, 2016



Federal Aviation  
Administration



# Noise Modeling vs. Noise Measuring



Federal Aviation  
Administration

# Measured noise data is the basis for the noise models

- INM/NIRS are based on international standards i.e. SAE
- Aircraft manufactures provide noise data
- Noise data is integrated into noise models and verified before release
- Field noise measurements have been taken at various locations to validate modeling



# Field noise measuring has limitations

- Noise modeling is used to evaluate historical, existing, and forecast scenarios
- Noise measuring would only evaluate historical scenarios
- Noise measuring would require many monitors over large geographical area for a long period of time to replicate modeling



# Field noise measuring is typically done at specific locations

- Noise measuring may be used at a specific location to demonstrate noise exposure for a give period of time
- Airport operators have installed noise monitors in some communities
- SFO installed noise monitors under the SERFR




# Class B



Federal Aviation  
Administration

# Current - SERFR Descent Profile

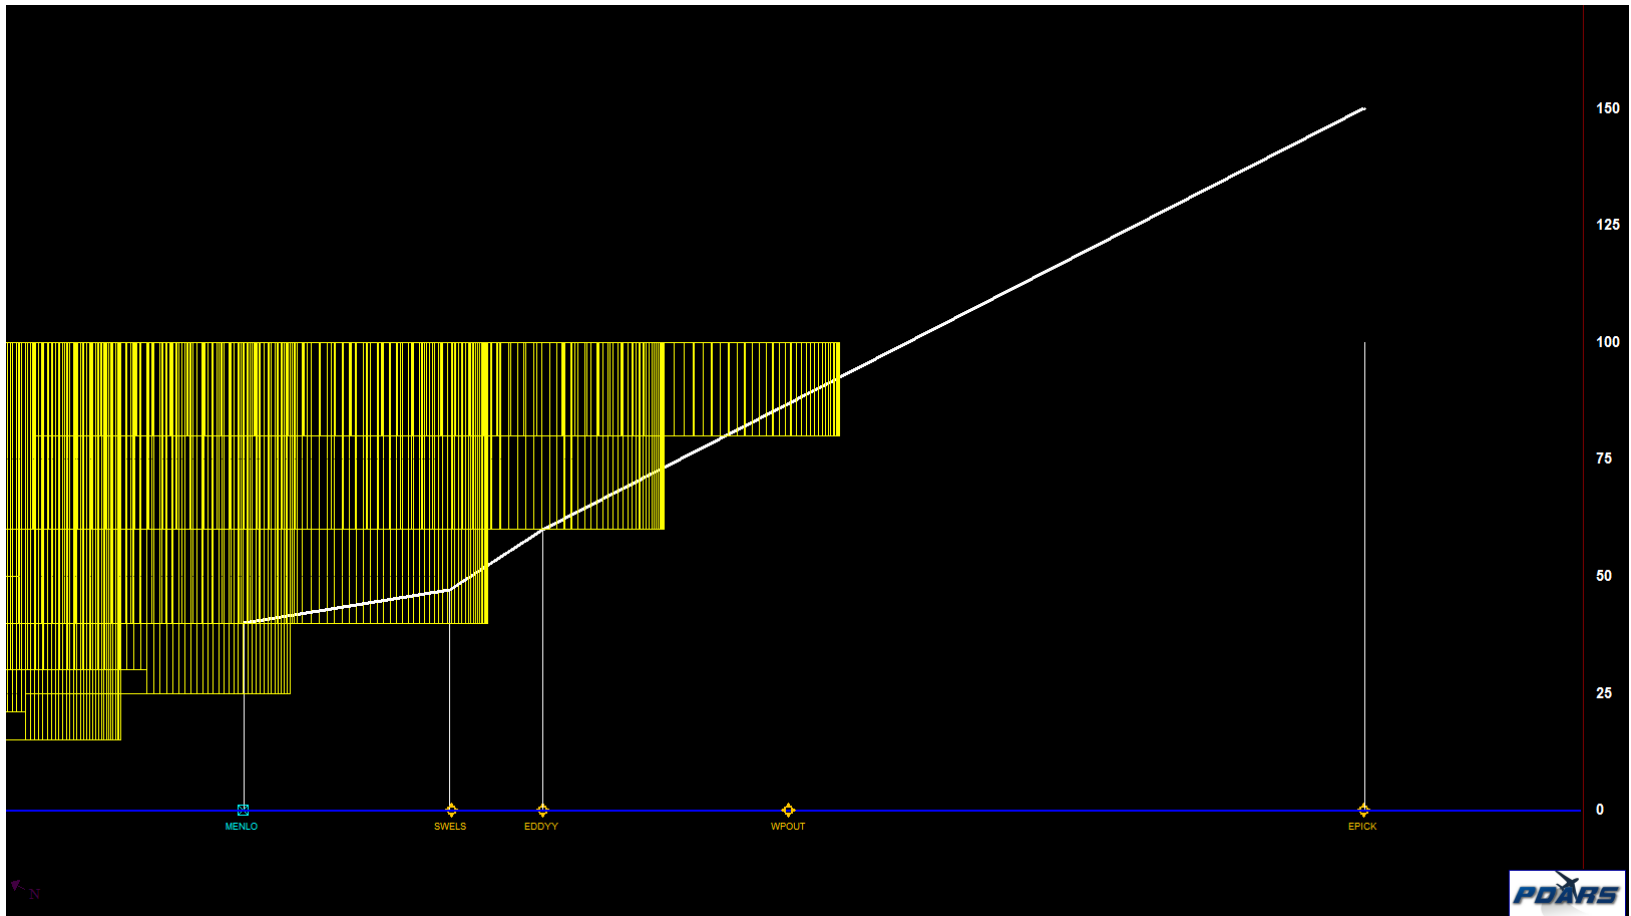

Federal Aviation  
Administration