

Lifelines and earthquake hazards in the Interstate 5 Urban Corridor: Cottage Grove to Woodburn, Oregon

E.A. Barrow¹, S.C. Weaver², K.L. Meagher³, T. Wong³, J.P. Muller⁴, M. Wang⁵, R.A. Hengsdorf⁶, R.E. Wells⁷, D.B. Ballarín⁸, M. Durieux⁹, and the Southern Willamette Valley Working Group

¹ U.S. Geological Survey, Dept. of Earth & Space Sciences, Box 351510, University of Washington, Seattle, Washington, 98195; ² Oregon Department of Geology and Mineral Industries, Portland, OR; ³ now at Kentucky Geological Survey, Lexington, KY; ⁴ Oregon Department of Geology and Mineral Industries, Portland, OR; ⁵ U.S. Geological Survey, Menlo Park, CA; ⁶ U.S. Geological Survey, Menlo Park, CA; ⁷ U.S. Geological Survey, Menlo Park, CA; ⁸ Oregon Department of Geology and Mineral Industries, Portland, OR; ⁹ Representatives from Benton County; Eugene Water and Electric Board; Lane Council of Governments; Lane County; Marion County; Kinder Morgan Energy Partners; Oregon Geospatial Data Clearinghouse; Oregon Public Utilities Network; Oregon Department of Transportation; Region 2 Pipeline; Southern University of Oregon; Willamette Pipeline Company

The lifeline systems and geology shown on the accompanying map have been greatly simplified. Most systems are shown in a general way for graphical purposes and may not be accurate in detail. In several locations where one system overlaps another, system elements have been adjusted so that they are more distinctly visible on the map. The surface geology has been simplified for the purposes of providing regionally consistent geological characteristics throughout the entire study area (Cottage Grove, Oregon, to Vancouver, British Columbia). This map should not be used for any site-specific purpose. Any site-specific consideration requires more detailed geotechnical and geological data than are presented in this map.

INTRODUCTION

The Interstate 5 highway corridor, stretching from Mexico to Canada, is not only the economic artery of the Pacific Northwest, but is also home to the majority of Oregonians and Washingtonians. Accordingly, most regional utility and transportation systems, such as railroads and electrical transmission lines, have major components in the I-5 corridor. The section of I-5 from Cottage Grove, Oregon, to Blaine, Washington, is rapidly urbanizing, with population growth and economic development centered around the cities of Eugene, Salem, Portland, Olympia, Tacoma, Seattle, Everett, and Bellingham. For the purposes of this map, we refer to this area as the I-5 Urban Corridor.

Lifelines in Earthquake country
Economic success in this urban corridor heavily depends on essential utility and transportation systems, called lifelines systems, such as highways, railroads, pipelines, ports, airports, communications, and electrical power. Consequently, natural disasters that disrupt these lifeline systems can cause economic losses. For example, a major winter windstorm may disrupt an electrical system causing loss of power at smaller distribution substations and widespread power outages due to falling trees breaking power lines. As a result, hundreds of thousands of residents and businesses may be without power for a day or longer. Larger scale natural disasters, such as earthquakes, can present more complex challenges because they tend to affect and disable many lifeline systems at once. For example, failures in the highway system after an earthquake may make restoration of electrical power substations or sewer treatment plants more difficult. Subsequently, determining priorities and strategies for recovery becomes increasingly difficult due to the potential simultaneous failures of several systems.

As the 2001 Nisqually earthquake reminded us, the Puget Sound region is earthquake country. Large-magnitude, damaging earthquakes struck Olympia in 1949 and Seattle in 1965, and the 2001 Nisqually earthquake occurred very near the epicenter of the 1949 event. In addition to these large events, earthquakes are felt in the Puget Sound region about once a month. In contrast, the southern part of the I-5 Urban Corridor, the Eugene and Salem areas in particular, has experienced very few felt earthquakes in history. However, during the last decade earth scientists have uncovered convincing evidence suggesting that the entire Urban Corridor, from Eugene to Vancouver, B.C., is at risk from great off-shore subduction zone earthquakes, perhaps of magnitude 9.

Lifelines and earthquake hazards map

Understanding where major lifeline systems are located in relation to earthquake hazards and population centers is an important first step in developing mitigation strategies that can make the I-5 Urban Corridor more earthquake resistant and expedite economic recovery after an earthquake. Lifeline systems are complex webs that cross through many communities and areas of higher and lower earthquake hazards. The result of the geographic relationships between the lifelines and underlying geology is a complicated multi-layered network that can be difficult to visualize for planners, emergency response providers, elected officials, and other non-specialists.

To meet the need for a simple and integrated graphical representation of lifeline systems and earthquake hazards, the United States Geological Survey, in cooperation with public agencies and private companies, has developed a series of maps for the I-5 Urban Corridor. We have divided the I-5 Urban Corridor into four regions from Cottage Grove, Oregon to southern British Columbia. This map covers Cottage Grove to Woodburn, Oregon (from about 1.5 miles past 160 to 274). The intent is to provide an overview of the lifeline systems and the corresponding earthquake hazards for the citizens, engineers, planners, and decision-makers who live and work in this region. Please note that this map does not provide site-specific information for engineering or environmental purposes.

The base of the I-5 Corridor maps is a shaded-relief background that provides a quick, qualitative depiction of slopes and river valleys. The regional geology is generated and categorized as probably less hazardous (green) or probably more hazardous (beige) ground in the event of an earthquake. Simplified lifeline system elements superimposed on the geology base are shown for major electric power transmission lines, water supply pipelines, natural sewer pipelines and treatment plants, and major ports and airports. Each map also shows recent earthquake locations of magnitude 2.0 and larger and historically important earthquakes estimated to be larger than magnitude 5.0. On this map from Cottage Grove to Woodburn, Oregon, the only seismic event known to be greater than magnitude 5 is the magnitude 5.7 Scotts Mills earthquake east of Salem in 1993.

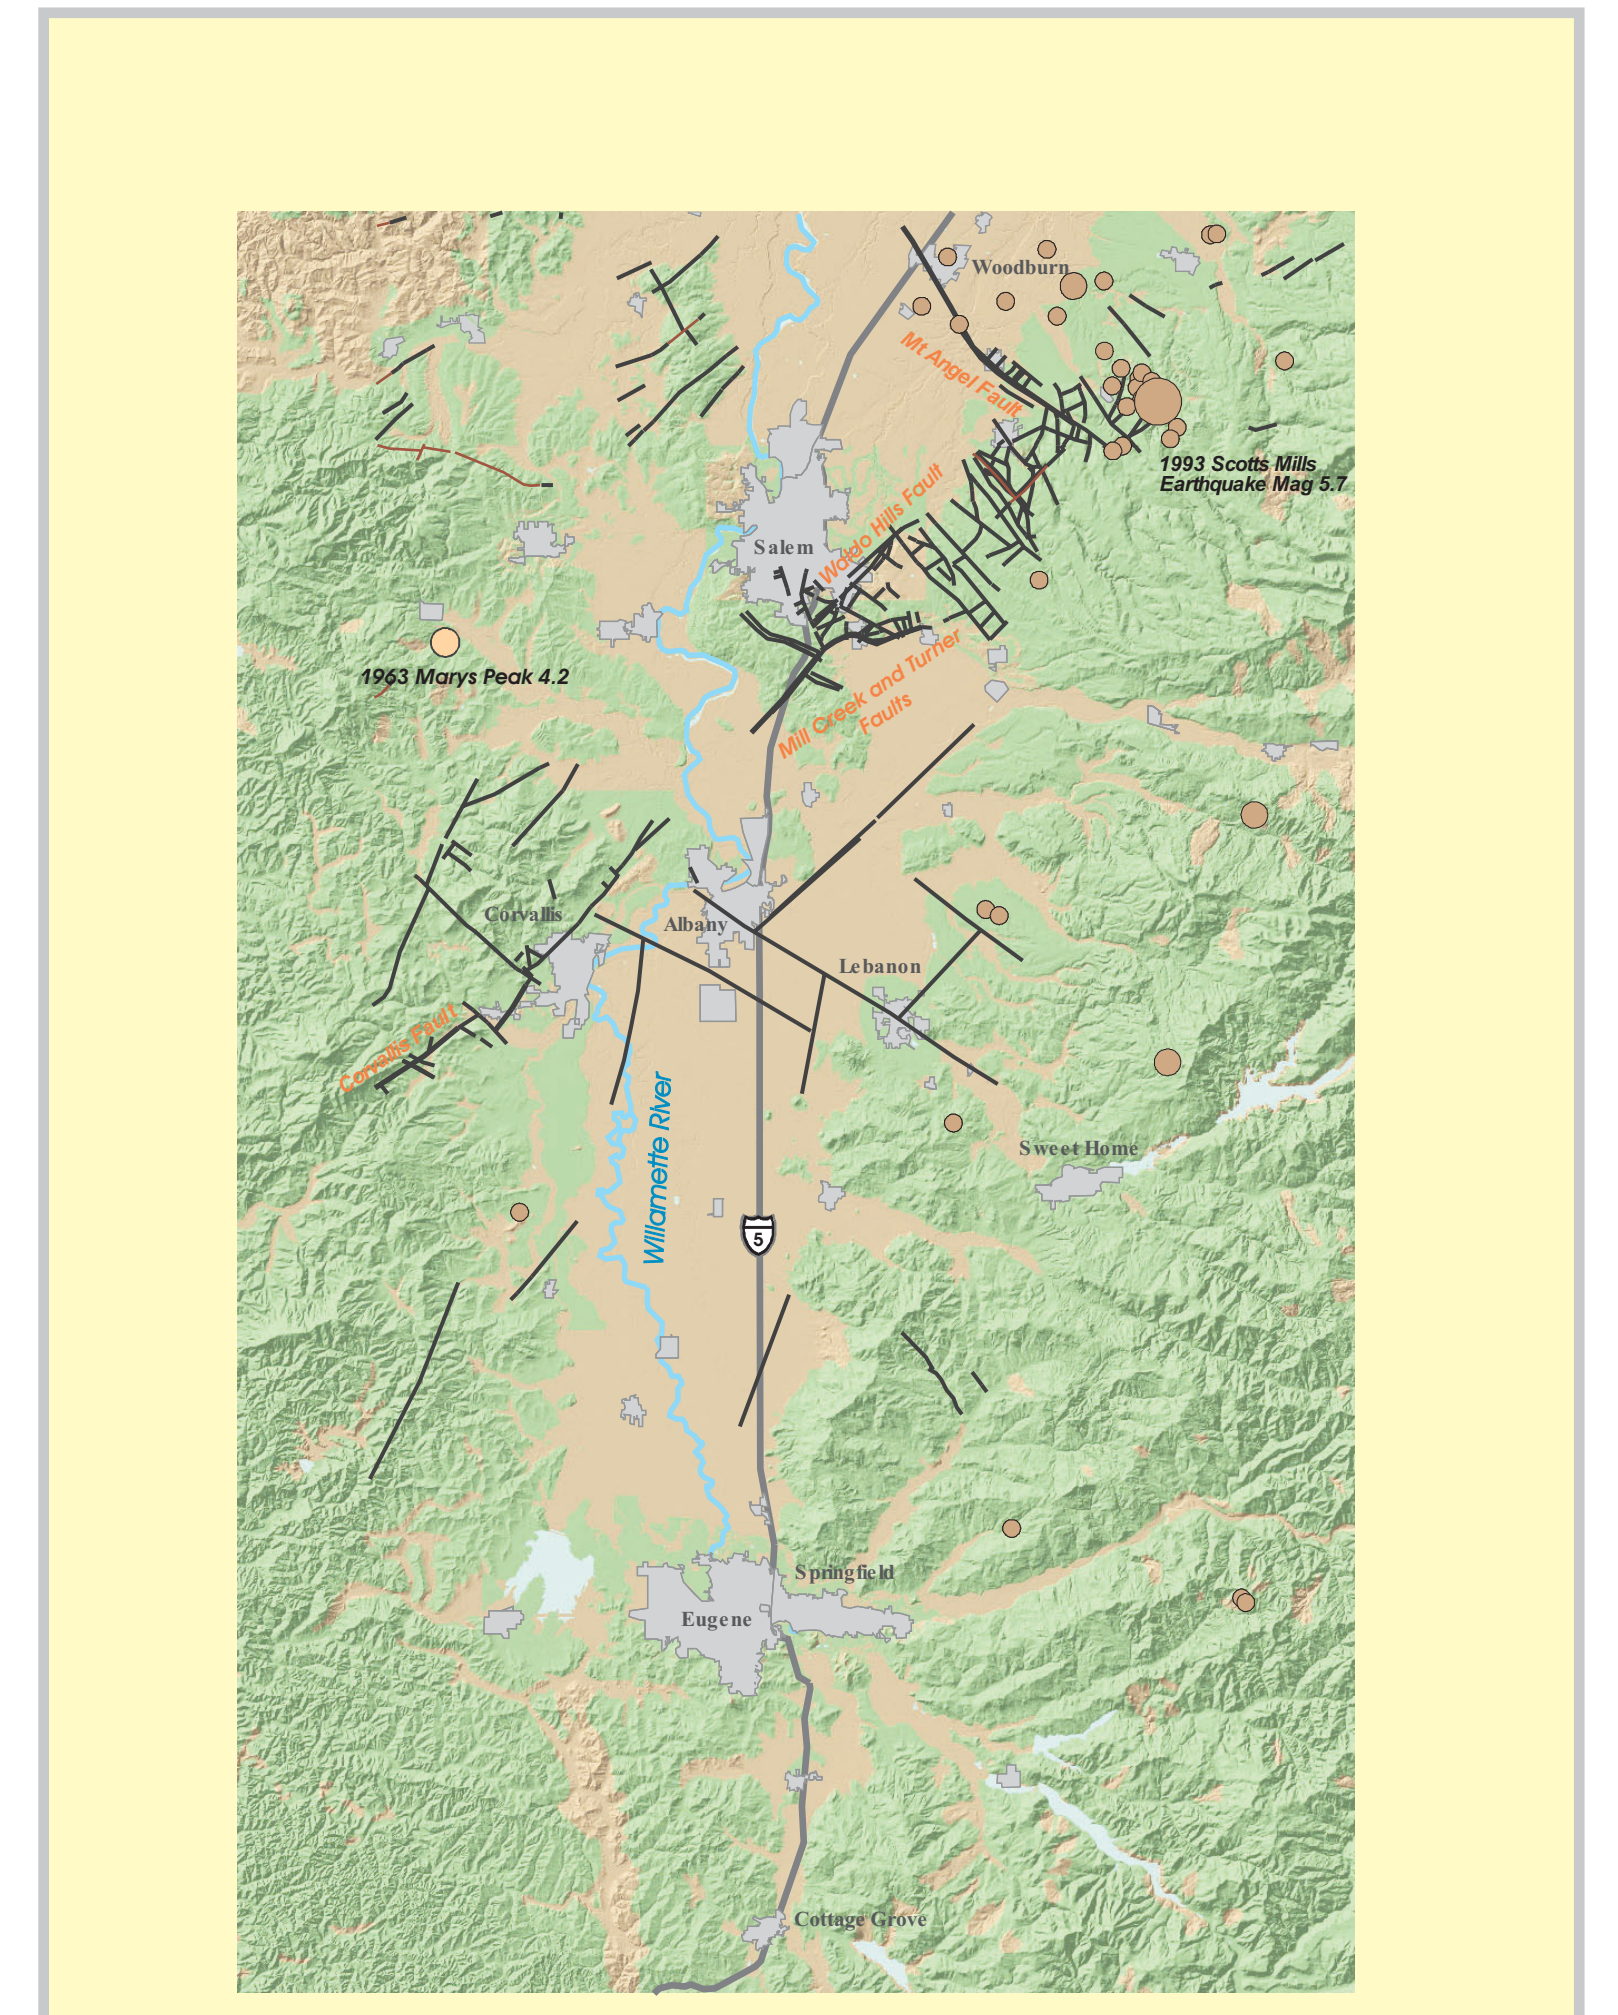


Figure 2. Faults and earthquakes in the Willamette Valley and vicinity. Solid lines show crustal faults identified by Yeats and others (1996). Darker lines indicate faults discussed in text. Earthquakes are plotted in 3 magnitude ranges and two shades. Smallest symbols represent events between magnitude 2.0 and 3.4, medium symbols between 3.5 and 4.9, and largest symbol size is over 5.0. Only the 1993 Scotts Mills earthquake (magnitude 5.7) is greater than magnitude 5. Light symbols are intraplate events, dark symbols crustal earthquakes. (After Blakely and others, 2000)

LIFELINE SYSTEMS ON THE MAP

One purpose of the map series is to schematically show how the major regional lifeline systems connect with population centers. Representing highways, railroads, electrical transmission lines, and petroleum and natural gas pipelines is relatively straightforward since these systems are regional. However, representing local water and wastewater systems is more difficult because there are many local systems in the Willamette Valley. With the assistance of local agencies, we have selected and schematically shown major systems for the five cities that have populations greater than 40,000 (Table 1). These cities represent about 50% of the population in the Willamette Valley. In all cases, the service area for water and wastewater utilities extends outside the boundaries of the city limits. For example, the estimated 65% of the population in the Willamette Valley.

City or Urban Area	Population (July 1, 2000)	Year
Canby-Barlow-Aurora	IMS-8	1999
Cottage Grove	IMS-9	2000
Dallas	IMS-7	1999
Eugene-Springfield	IMS-14	2000
Lebanon	IMS-7	1999
McMinnville-Dayton-Lafayette	IMS-7	1999
Madras	IMS-7	1999
Newberg-Dundee	IMS-7	1999
Salem	GMS-103	1996
Sheridan-Willamina	IMS-7	1999
Stacyton-Mount Angel	IMS-8	1999
Stacyton-Sublimity	IMS-8	1999
Aumsville	IMS-8	1999
Sweet Home	IMS-8	1999
Woodburn-Hubbard	IMS-8	1999

Highways
Large volumes of traffic generally flow north-south through the I-5 Urban Corridor with between 25,000 vehicles per day near Cottage Grove to over 80,000 per day near Woodburn. In the Eugene urban area, both I-5 and I-105 have about 60,000 vehicles per day. In the post-earthquake emergency, routes parallel to I-5, such as Oregon 99W, may be important as initial corridors for relief efforts. Traffic counts on Oregon 99W generally are less than 15,000 vehicles per day between major population centers. Most of the I-5 bridges were constructed between the late 1950s and the mid-1970s.

Liquid Fuel
The Willamette Valley is served by a steel, 48-inch diameter liquid fuel line operated by Kinder Morgan Energy Partners, which connects to a pipeline owned by BP-Amoco Pipeline Company. The BP-Amoco line transports liquid fuel in a pair of pipelines (16-inch and 20-inch) from refineries in northern Washington south to Renton near Seattle. One line continues from Renton to Portland and then south into the Willamette Valley, which receives much of its gasoline through this pipeline. The pipeline terminates in Hartge area.

Water
There are five large water supply in the Willamette Valley region: Albany, Corvallis, Eugene and Springfield, Watersheds in the Cascade Range supply Eugene, Albany, and Salem. The McKenzie River feeds the Eugene system, while Albany's system relies on the South Santiam River. Springfield is supplied by groundwater from a local aquifer and the system has emergency connections with Eugene. Corvallis relies on water from both the Willamette River and Rock Creek, located in the Coast Range.

Wastewater
There are four wastewater systems serving the five largest cities. One system serves the Eugene-Springfield area. This system has a wastewater plant that discharges into the Willamette River. Major sewer lines, generally selected by pipe diameter, are shown on the map.

Electrical Power
The major electric power provider in the Pacific Northwest is the Bonneville Power Administration, which transmits the region's electricity from hydroelectric plants along the Columbia and Snake rivers to the I-5 Urban Corridor. BPA sells power to the major distributors in the region: Portland General Electric, Pacific Power, and Eugene Water and Electric Board. Each of these distributors has some generation capacity. Much of the power

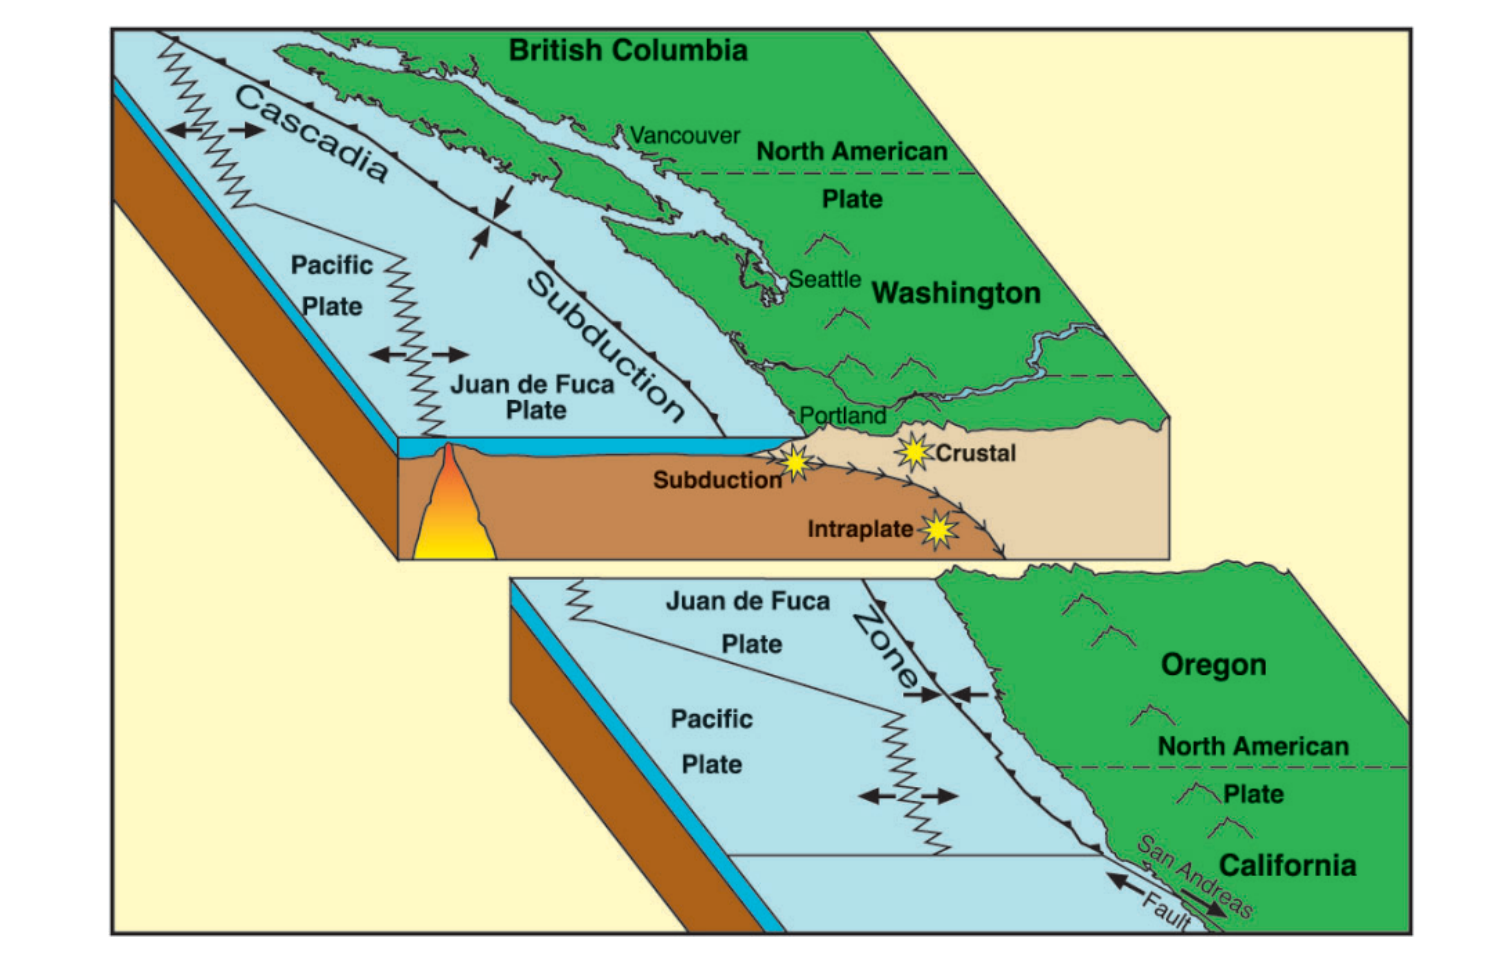


Figure 1. Schematic diagram showing the regional plate tectonic setting of the Pacific Northwest. Oregon is shaded to show the location of the three seismic source zones: subduction, intraplate, and crustal. Modified from Black and others, 2000.

GEOLOGY AND EARTHQUAKE HAZARDS

Despite the lack of recent, large, damaging earthquakes, earth scientists now understand that earthquake hazards in the Willamette Valley are greater than previously known. This may seem at odds with the experience of long-time residents who can recall only the large earthquakes further west in Olympia in 1949 and Seattle in 1965 versus the relative quiet in 2001. The recent Nisqually earthquake on February 28, 2001, only serves to further highlight the Puget Sound region's more exposure to earthquake hazards. However, two fault zones have drawn the attention of earth scientists with respect to Oregon. In the early 1990s, scientists reached a broad consensus that geologic evidence supports the history of great subduction zone earthquakes, of magnitude 8 to 9, repeatedly striking along the Oregon coast and shaking the western interior of the state. Consequently, the understanding that great earthquakes occur on average every 500-600 years is one reason that the awareness of earthquake hazards in the Willamette Valley has increased. In addition, earth scientists are beginning to develop an understanding of shallow faults near the earth's surface that may further influence earthquake hazard assessments for this part of the I-5 Urban Corridor.

Geologic Setting
Pacific Northwest earthquakes occur in three source zones: along the Cascadia subduction plate boundary, within the subducting plate (called the intraplate or Benioff zone), and within the crust of the overlying North American plate. Earthquakes from all three zones threaten the Willamette Valley.

SUBDUCTION ZONE
The forces responsible for producing earthquakes in western Oregon are generated by Juan de Fuca oceanic plate moving northward with respect to the North American continental plate at an average rate of 4 centimeters (1.5 inches) per year along the Pacific Northwest coast (indicated by the arrow in Figure 1). At the region of contact between the two plates, the Juan de Fuca plate slides (or subducts) beneath the North American continent and sinks slowly into the earth's mantle, producing the Cascade volcanoes and earthquakes. The zone of the shallow, east-dipping subducting plate is called the Cascadia megathrust fault. During subduction, the eastward motion of the Juan de Fuca plate is absorbed by compression of the overlying North American plate, generally resulting in little slip on the Cascadia megathrust fault. Geological evidence provided by buried soil layers, dead trees, and deep-sea deposits indicates to geologists that the upper portion of the shallowly dipping Cascadia fault is inactive and releases this compression in great earthquakes of magnitude 8 to 9 about every 500-600 years. The last such earthquake occurred on January 26, 1700.

When the Cascadia subduction zone ruptures, it will likely cause:

- Severe ground motions along the coast, with shaking in excess of 1g peak horizontal acceleration in many locations. The unit 1g is the acceleration of gravity and is used as a measurement of the severity of earthquake ground motions. The central Willamette Valley can expect ground motions of about 0.2g in the areas of low hazardous geologic conditions on the map. Shaking levels will be greater westward toward the coast.
- Strong shaking that may last for two to four minutes as the earthquake propagates along the fault and may include long-period seismic waves that can affect very tall structures or high bridges.
- Tsunamis generated by sudden uplift of the sea floor above the Cascadia megathrust fault. The history of earthquakes in the subduction zone by observing effects of past tsunamis such as marine sediments deposited inland and ancient forest trees.
- Shaking effects that may significantly damage the coast.

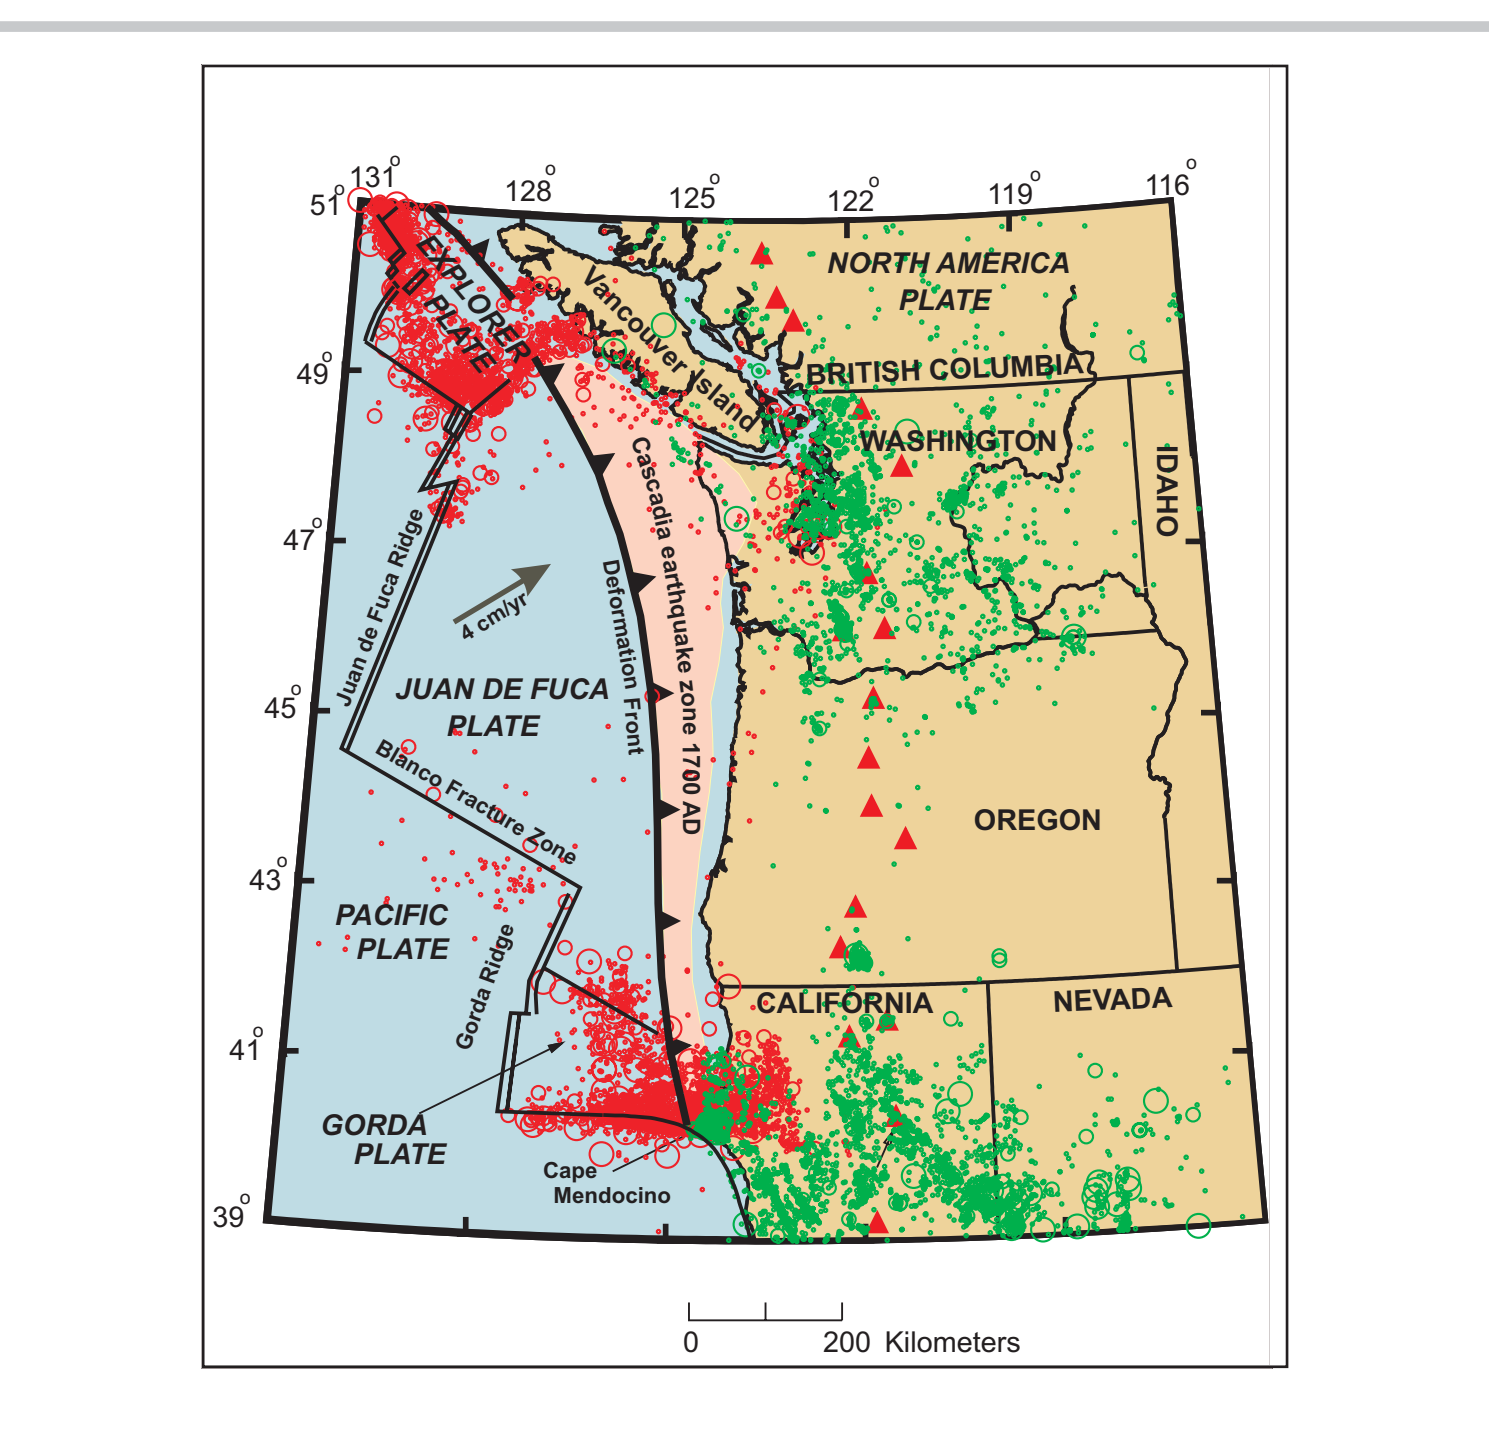


Figure 3. Earthquakes in Cascadia. Known earthquakes greater than magnitude 6 since about 1870, magnitude 5 since 1950, and earthquakes of magnitude 2 and greater located by the modern seismicographic networks and catalogued by the University of Washington (www.eeri.washington.edu). Smallest circles are magnitude 2, intermediate circles are magnitude 5 and 6, and the largest circles are greater than magnitude 6. Earthquakes are grouped into two broad zones: red earthquakes occur in the intraplate zone, along with events that occurred within the shallow portion of the Juan de Fuca plate, and shallow crustal events are the green earthquakes. The 1700 AD Cascadia earthquake zone is shown in pink. The red triangles are the Cascade volcanoes.

Earthquake Distribution
Since the Cascadia subduction region stretches the length of the Pacific Northwest coast, it is useful to consider the distribution of earthquakes across the entire plate boundary system and examine the regional picture formed by integrating all the earthquake source zones. Compared with earthquakes in the intraplate zone, crustal events are much more widespread, occurring over much of northern California and most of Washington. However, Figure 3 shows that there are relatively few earthquakes in Oregon and that the Willamette Valley is particularly quiet. This is due to the fact that scientists know from field studies that subduction events are possible, there are no recent Cascadia zone earthquakes that have been located in Oregon. Thus, in the absence of recent significant seismic data, Figure 3 illustrates the importance of conducting more geological field studies and examining evidence of historical earthquakes in order to link recent earthquakes to faults and create a more complete understanding of the potential for future significant earthquake occurrences in the Willamette Valley.

Probabilistic Ground Motion Map
A useful representation of earthquake shaking hazards is a probabilistic hazard map, which the USGS has developed for the entire country (Frankel and others, 1996, and see <http://geohazards.cr.usgs.gov/index.html>). These maps underpin seismic building codes and many highly conservative standards. The probabilistic hazard (Figure 4) shows the expected peak horizontal ground motions on a rock site with a 2% probability of being exceeded within a time frame of 50 years. Figure 4 includes all three potential earthquake sources for the Northwest: subduction zone, intraplate zone, and crustal faults. These maps rely on local geologic and seismic data. In this region the hazard is dominated by the subduction zone source, which also includes the Juan de Fuca plate eastward into the Willamette Valley, the contours represent north-south to the south, but from Lane County northward the contours turn north-south. The contours represent increased rates of seismicity originating in the northern Oregon Coast Range (Figure 3) and of Scotts Mills (Figures 2 & 3). The eastward slope of higher expected ground motions in the Seattle area reflects the high level of late-magnitude intraplate earthquakes that have occurred and can be expected in this region.

The east-west oval contour of relatively higher hazard in central Puget Sound reflects current scientific understanding of the Seattle fault and illustrates how increasing the detailed geologic knowledge of an individual fault may change hazard assessment. For example, an area of larger hazard around the Seattle fault was included in later maps because field and seismic studies demonstrated that large (M 7.0) earthquakes have occurred on the Seattle fault in the past. Geologic studies examining faults are in progress in western Oregon to determine the regional hazard assessments.

LIFELINE VULNERABILITY TO EARTHQUAKES

The vulnerability of a lifeline to earthquakes is related to the type and condition of lifeline structure and to the severity of the specific earthquake hazard. Lifeline building structures can be vulnerable to earthquake shaking, just as some residential and commercial buildings structures. There are many special types of structures such as substations, pipelines, transmission towers, or pipelines that are found in lifeline systems. Damaged to one of these system components may affect the ability of the entire system to function.

Pipelines: Water, Wastewater, Liquid Fuel, and Natural Gas
Buried pipelines carrying water, wastewater, natural gas, and liquid fuel can be vulnerable to surface faulting, liquefaction and lateral spreading. Pipelines constructed of brittle materials are the most vulnerable because they are not able to bend and flex. Water and older gas pipelines (low pressure) systems often have significant amounts of brittle cast iron pipe. Abestos cement pipe found in many water systems is also brittle. Pipelines constructed of relatively ductile materials such as steel or ductile iron are more resistant to earthquake-induced failure. If liquefaction occurs, joint restraint is also important to prevent ruptures. Modern welded joints used on gas and liquid fuel lines, and "restrained" joints used for some water pipelines are preferred in areas subject to liquefaction. Pipelines buried in liquefiable soils can be susceptible to damage rates an order of magnitude larger than those in stable soils.

Natural Gas and Liquid Fuel Pipelines
Natural gas and liquid fuel pipelines constructed of steel with welded joints have performed well except in the most extreme conditions of large permanent ground displacements. Modern pipelines welded with other techniques are in some cases more brittle, and have failed. During an earthquake, it is common for many water pipelines on soft soils to fail, which can quickly drain the water system. Therefore, a failure, water is not available for fire suppression. This scenario occurred following the 1995 Kobe (Japan), 1994 Northridge (California), 1989 Loma Prieta (California), 1923 Tokyo (Japan) and 2006 San Francisco (California) earthquakes. In the worst earthquakes, such as Kobe, the water service was not fully restored for more than two months.

Sever pipelines are vulnerable to flotation if the ground around them liquefies. As these are often gravity-operated systems, a change in grade can impair system operation. In the 1995 Seattle earthquake, a 108-inch diameter sewer was damaged when it floated upward approximately two feet. Many sewers floated in the 1989 Loma Prieta earthquake, particularly in Santa Cruz, and in the 1995 Kobe Earthquake.

The Nisqually earthquake caused approximately 25 water pipeline failures, fewer than 10 natural gas distribution lines, one sewer failure, and no natural gas transmission or liquid fuel line failures.

Tanks and Reservoirs
Earthquakes can cause liquids, such as water and liquid fuels, to slosh in tanks and reservoirs. Sudden ground motion and subsequent movement of the base of a tank can load a tank beyond capacity. An overloaded tank may rock, resulting in connecting pipe to break. As sloshing continues, rocking may cause the tank to buckle or burst. Sloshing can also damage roofs and immersed components such as baffles and sludge racks. In the Nisqually earthquake approximately 15 tanks were damaged, none catastrophically. Ifrogan tanks. Tanks containing liquid fuel have been broken and their contents burned. Earthen reservoirs and dams can also be vulnerable to liquefaction and subsequent failure. For example, the Lower Van Norman Dam was damaged by liquefaction in the 1971 San Fernando (California) earthquake although not catastrophic water release occurred.

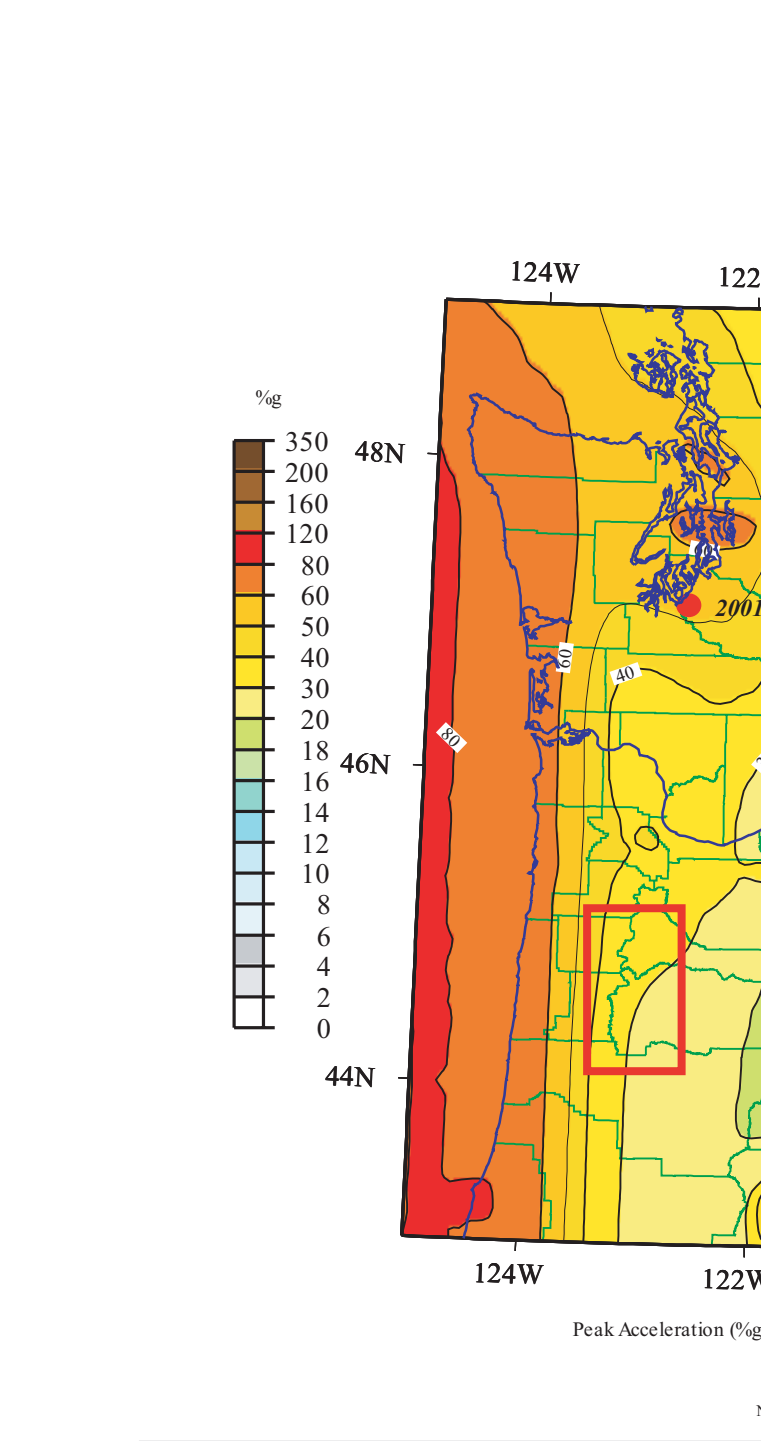


Figure 3. Earthquakes in Cascadia. Known earthquakes greater than magnitude 6 since about 1870, magnitude 5 since 1950, and earthquakes of magnitude 2 and greater located by the modern seismicographic networks and catalogued by the University of Washington (www.eeri.washington.edu). Smallest circles are magnitude 2, intermediate circles are magnitude 5 and 6, and the largest circles are greater than magnitude 6. Earthquakes are grouped into two broad zones: the red earthquakes occur in the intraplate zone, along with events that occurred within the shallow portion of the Juan de Fuca plate. Shallow crustal events are the green earthquakes. Triangles are volcanoes.

ABOUT THE MAP

The base map was derived from standard USGS 30-meter digital elevation models (DEMs). Shorelines and streams are from USGS digital line graphs (DLGs) derived from standard 1:100,000 scale maps (see <http://dli.cr.usgs.gov/>). This map is based on material originally published in U.S. Geological Survey Open-File Report 99-387.

Earthquakes and geologic units on the map
There have been very few felt earthquakes located or detected in the Willamette Valley since a modern seismicograph was installed in Corvallis in 1962. On the map we have plotted local earthquakes selected from the University of Washington seismic catalog ranging in magnitude from 2.0 to 5.7. Nearly all located earthquakes occurred in the crust of the North American plate. Most of the events are located in the northeastern portion of the map and were aftershocks of the 1993 Scotts Mills event. Most of the events are less than magnitude 3.5 (Madden and others, 1993).

The only other notable earthquake in the map area is a deep earthquake that occurred in 1962 northwest of Corvallis, and was an intraplate type similar to the 2001 Nisqually earthquake. This magnitude 4.5 event is the largest known intraplate earthquake in Oregon from the California border north to the Columbia River.

The geologic units shown on the map have been simplified into two basic units represented by the map colors of beige and green. The beige color represents unconsolidated surface deposits, which are susceptible to liquefaction, ground amplification, and/or landslides triggered by a seismic event. Surface rocks and deposits considered to be seismically less subject to liquefaction, amplification, or landslides than the beige working deposits are shown in green colors. These units consist of bedrock and older well-consolidated deposits. Geologists working on this project reached a consensus on which mapped geologic units should be placed into each category. One way to evaluate these units is to consider the beige areas as probably more hazardous relative to the green areas in terms of possible earthquake hazards. The geologic information varies regional to regional. The different geologic units occur in different areas reflecting different mapping scales from local to regional scales. The geologic information varies regional to regional. The different geologic units occur in different areas reflecting different mapping scales from local to regional scales.

The lowest resolution data is based on a statewide building code soils map developed using a 1:500,000 scale map by Walker and McLeod (1991). Seismologists refer to the very near surface units as soils, which Wang and others (1998) divided into six types, of which beige and green are the green category, and D-F into the beige category. These data primarily cover the western and eastern edges of the lifetime map. The intermediate resolution data are based on the 1:100,000 map of Quaternary time deposits in the Willamette Valley mapped by O'Connor and others (2001). Generally, beige areas adjacent to the coast are beige, green areas on the valley floor are all covered by the low-consolidated deposits and are categorized as probably more hazardous ground, beige. The beige and green categories from both the 1:500,000 and 1:100,000 maps are determined solely on the basis of geologic information and do not incorporate engineering analyses.

The highest resolution data are from 1:24,000 scale hazard maps produced by Oregon Department of Geology and Mineral Industries (DOGAMI) for many Oregon communities. IMS and GMS series maps plot relative earthquake hazards in four zones ranging from A, highest hazard to D, lowest hazard. Areas in zones A or C are categorized as beige on our map and zone D is green. DOGAMI maps, 0-101-05 that cover Benton County, show the full classification of Wang and others (1998). Communities with covered relative earthquake hazard maps are listed in Table 3.

REFERENCES
Black, G. L., Wang, Z., Wiley, T. J., Wang, Y., and Keeler, D. K., 2000. Relative earthquake hazard map of the Eugene-Springfield metropolitan area, Lane County, Oregon. Oregon Department of Geology and Mineral Industries Interpretive Map Series IMS-14, 16 p., 1 map sheet, scale 1:24,000.
Blakely, R.J., Wells, R.E., Tolan, T.L., Beeson, M.H., Treub, A.M., and Liberty, L.M., 2000. New aeromagnetic data reveal large strike-slip faults in the northern Willamette Valley, Oregon. Geological Society of America Bulletin, v. 112, p. 1225-1233.
Frankel, A., Mueller, C., Barnhard, T., Perkins, D., Leyendecker, E.V., Dickman, N., Hanson, S., and Hopper, M., 1996. National seismic hazard maps, June 1995 documentation. U.S. Geological Survey Open-File Report 96-352, 110p.
Madden, L.P., and Mabe, M.A., 1996. Earthquake hazard maps for Oregon. Oregon Department of Geology and Mineral Industries Interpretive Map Series IMS-7, 22 p., 1 map sheet, scale 1:24,000.
Madden, L.P., and Wang, Z., 1999. Relative earthquake hazard maps for selected urban areas in western Oregon: Canby-Barlow-Aurora, Lebanon, Silverton-Mount Angel, Stacyton-Sublimity, Aumsville, Sweet Home, Woodburn-Hubbard, Oregon Department of Geology and Mineral Industries Interpretive Map Series IMS-22, 11 p., 1 map sheet, scale 1:24,000.
Madden, L.P., and Wang, Z., 2000. Relative earthquake hazard maps for selected urban areas in western Oregon: Ashland, Cottage Grove, Grants Pass, Roseburg, Sutherlin-Oakland, Oregon Department of Geology and Mineral Industries Interpretive Map Series IMS-9, 21 p., 1 map sheet, scale 1:24,000.
O'Connor, J.E., Sama-Wojcicki, A., Wozniak, K.C., Pollett, D.J., and Fleck, R.J., 2001. Origin, extent, and thickness of Quaternary geologic units in the Willamette Valley, Oregon. In U.S. Geological Survey Professional Paper 1620. Oregon Department of Transportation, 2000. Transportation Key Facts 2000. Oregon Transportation Commission, Salem, Oregon, 1:500,000.
Wang, Y., and Leonard, W.J., 1996. Relative earthquake hazard maps of the Salem East and Salem West quadrangles, Marion and Polk Counties, Oregon, Oregon.

Electrical Power Facilities

Regional power systems went out of service following the 1995 Kobe, 1994 Northridge, and 1989 Loma Prieta earthquakes. Such failures are often due to self-protecting features engineered into the system, and can often be restored within 24 to 72 hours. Many of the power failures in the Seattle area from the 2001 Nisqually earthquake were self-protecting.

The most vulnerable components of electrical power systems are high voltage powerline insulators. The higher the voltage, the larger and more vulnerable the insulator to strong shaking. As a result, high-voltage substations, particularly those with 250 kV or above, can be the most vulnerable ground motion. Live tank circuit breakers, commonly used in industry, have not performed well in earthquakes. Rigid buses connecting substation equipment can transfer dynamic loads from other equipment, and exacerbate insulator failures. If well anchored, lower voltage equipment performs well. Ground motions from the Nisqually earthquake were not strong enough to produce significant damage at most substations.

Power poles and towers have performed well, except when they are founded on unstable soils where landslides or liquefaction can occur. In the 1993 Lander (California) earthquake, a tall tower supported by the base of a four-legged transmission tower. The tower was distorted, but it did not collapse. Ground shaking can cause low-voltage power lines to slip together causing short circuits. Higher voltage lines have greater separation, and thus are less prone to short circuits.

Highways
Bridges are usually the most vulnerable components of highway systems. More robust bridge designs were developed in the 1970s and 1980s. Older bridges, built to lower design standards, may be more prone to failure. Bridge decks can slide off their seats if the seats are too narrow or the seats are not adequately restrained. Supporting columns can buckle if they are overloaded and not designed with adequate ductility. Single-span bridges supported on abutments perform better. Bridge foundations in liquefiable soils can move, allowing the spans they support to slide off.

The Nisqually earthquake caused significant damage to about a dozen bridges and highway structures (Figure 6), but none collapsed. A major intersection at the junction of Interstate 5 and Interstate 90 in downtown Seattle was closed for several weeks while inspections and repairs were made. Bridge damage caused closure of northbound lanes of Interstate 5 for 12 hours in Chehalis, and the Alaska Way viaduct in Seattle was closed intermittently for weeks to assess and repair earthquake damage. The Duwamish Parkway was closed for weeks and Olympia due to lateral spreading (Figure 7). Landslides closed closure of highways 101, 202 and 302 (Figure 8).

Railways
Railway bridges in general performed well as a result of the very large loads they are designed to carry. Earthquakes in the U.S. and Japan have not tested the resistance of railroad bridges to liquefaction or lateral spreading in either mode of ground failure could cause loss of bridge approaches. In addition, a variety of hazards such as failed approaches, building debris, and ground failures could affect railroad right-of-ways.

Airports
Airport runways may be vulnerable to liquefaction. In the 1989 Loma Prieta Earthquake, 3000 feet at the end of the main runway of the Oakland Airport were taken out of service. Other airports were damaged, none catastrophically. Ifrogan tanks. The Nisqually earthquake caused similar damage at Boeing field. Most of the largest liquefaction zones correlated with old river channels. Airport control tower glass is vulnerable, as many tower structures are not adequately designed to transfer the roof load to the structure. Control towers at both the Seattle-Tacoma airport (Figure 9) and Boeing field were damaged during the Nisqually earthquake.

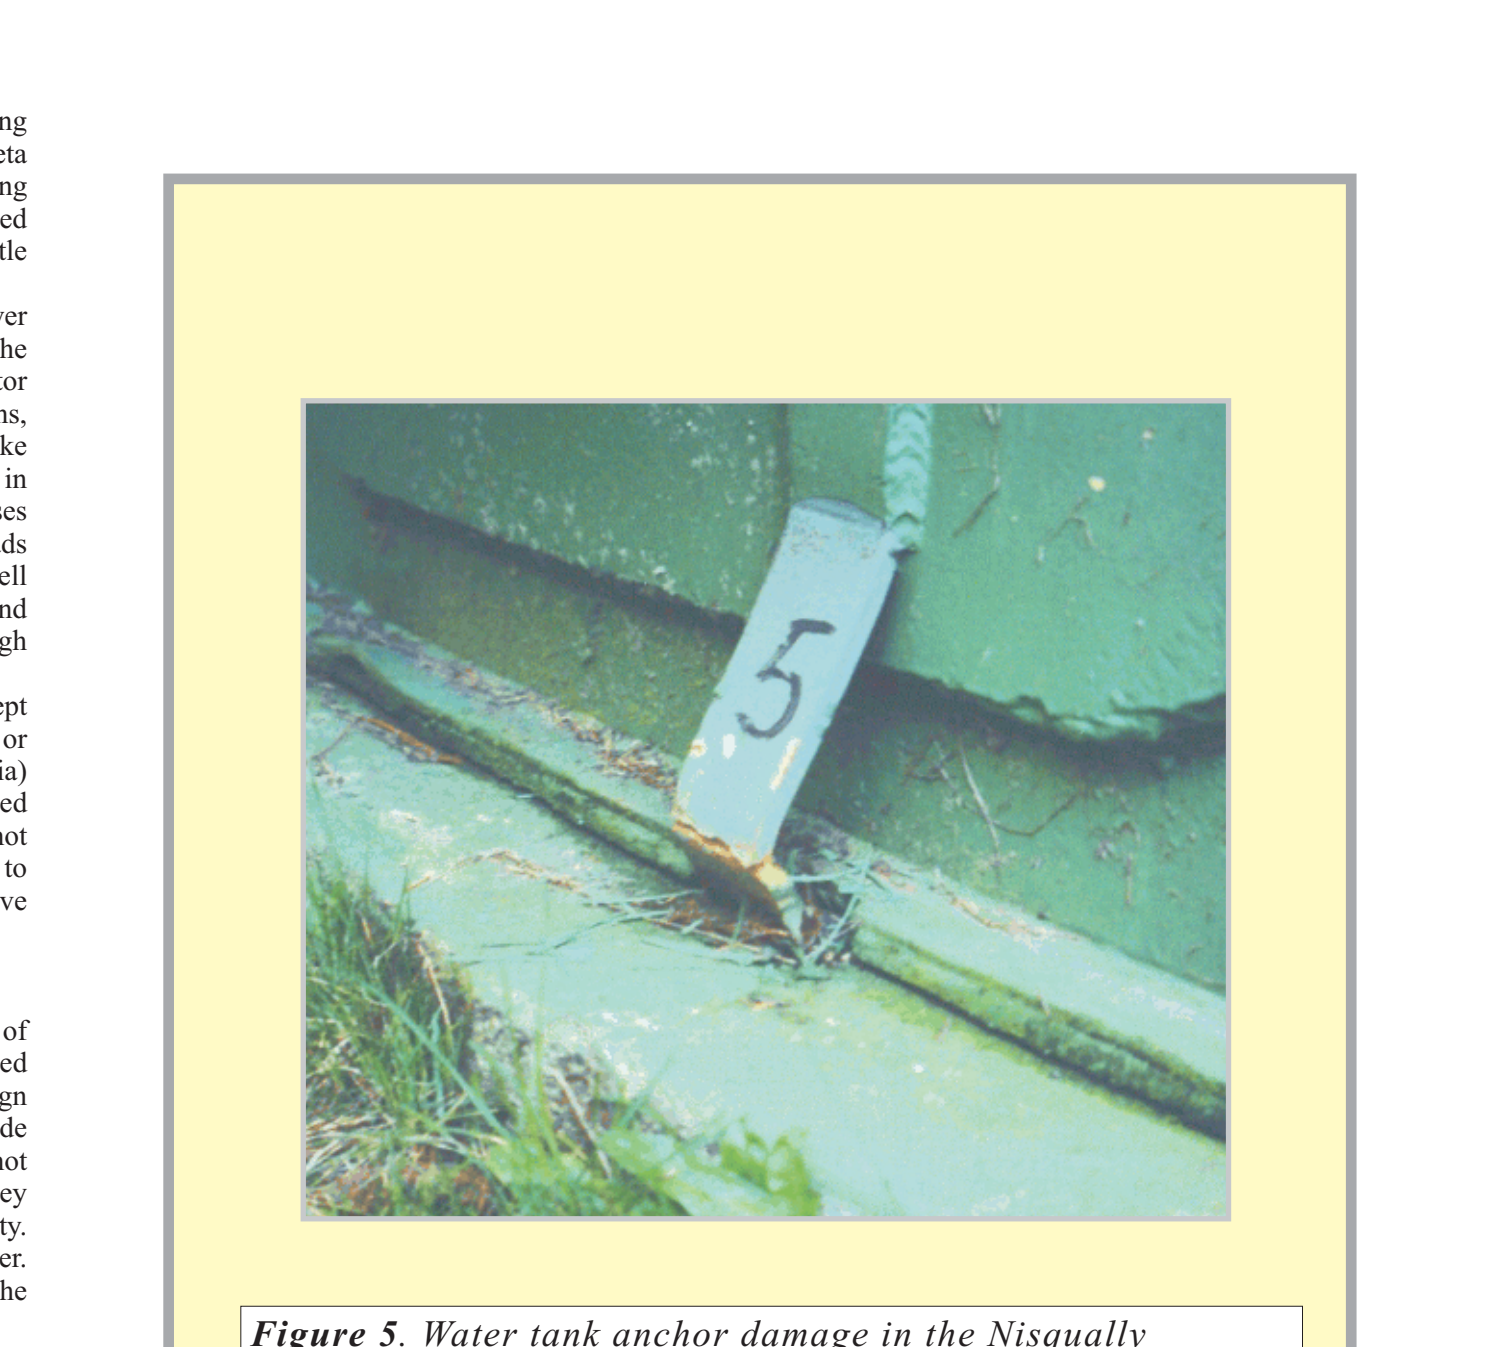


Figure 5. Water tank anchor damage from the Nisqually earthquake. The anchor is about 6" in length. (Ballantyne photo).

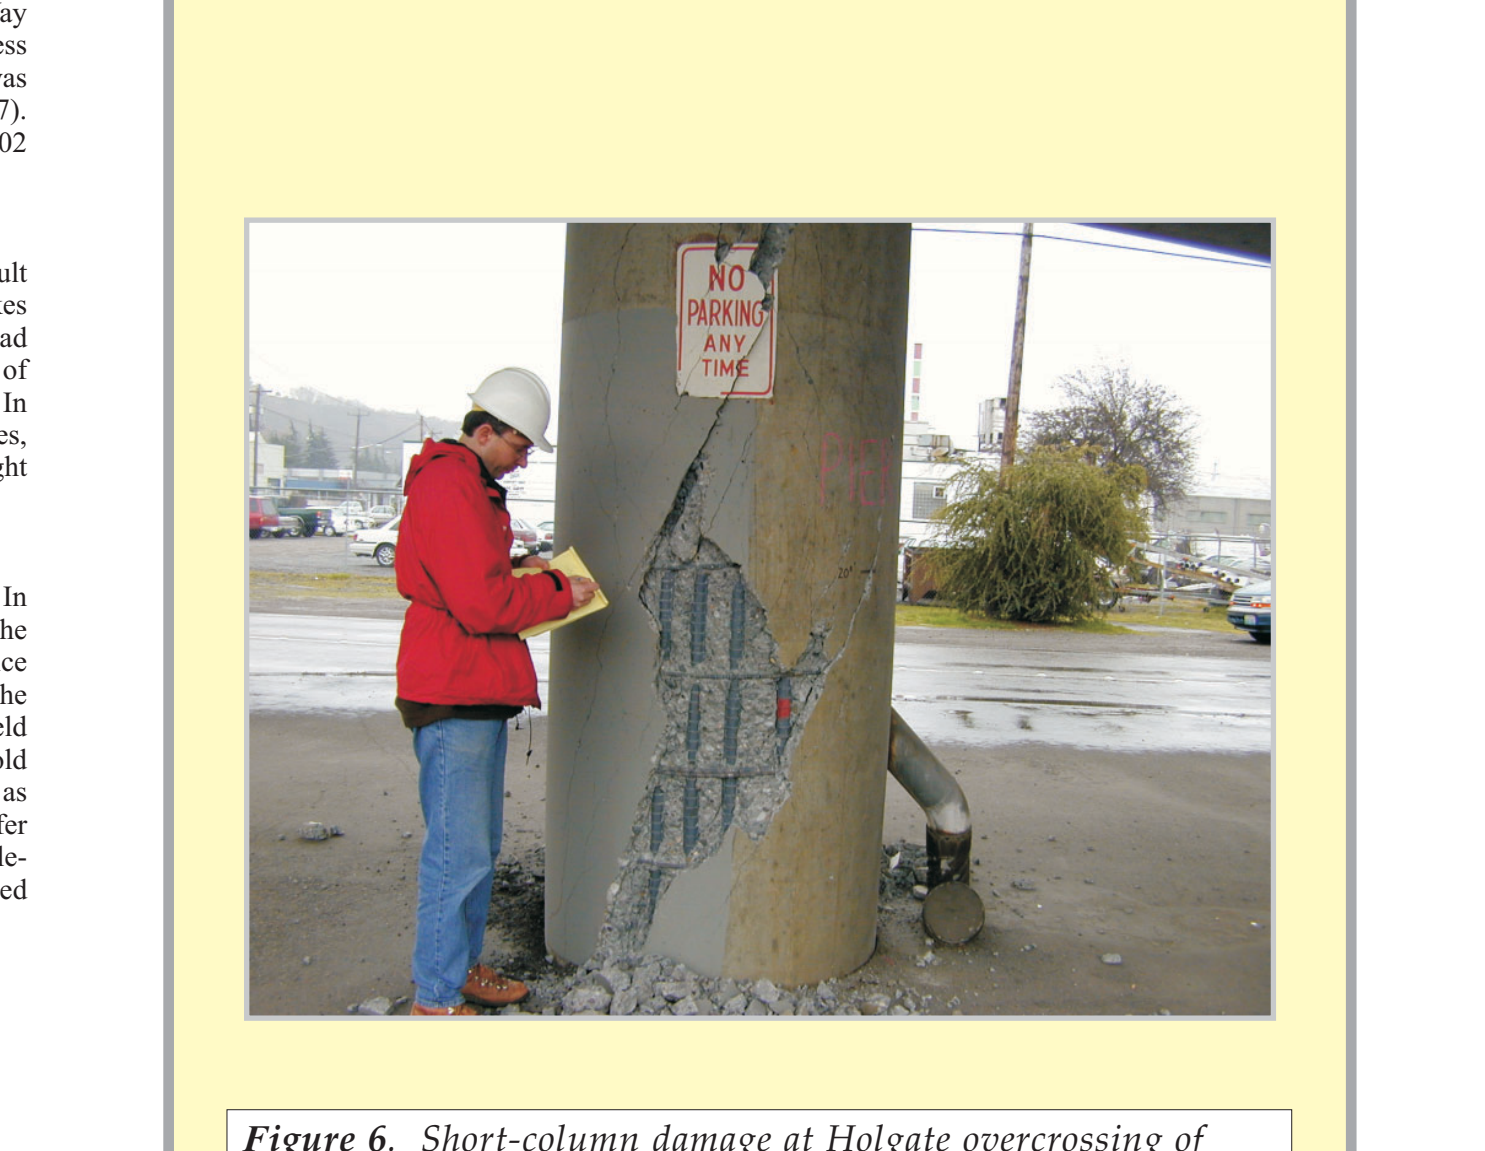


Figure 6. Short-column damage at Holgate overcrossing of Interstate 5 in Seattle caused by Nisqually earthquake. (Photo courtesy of Mark Eberhard, University of Washington).

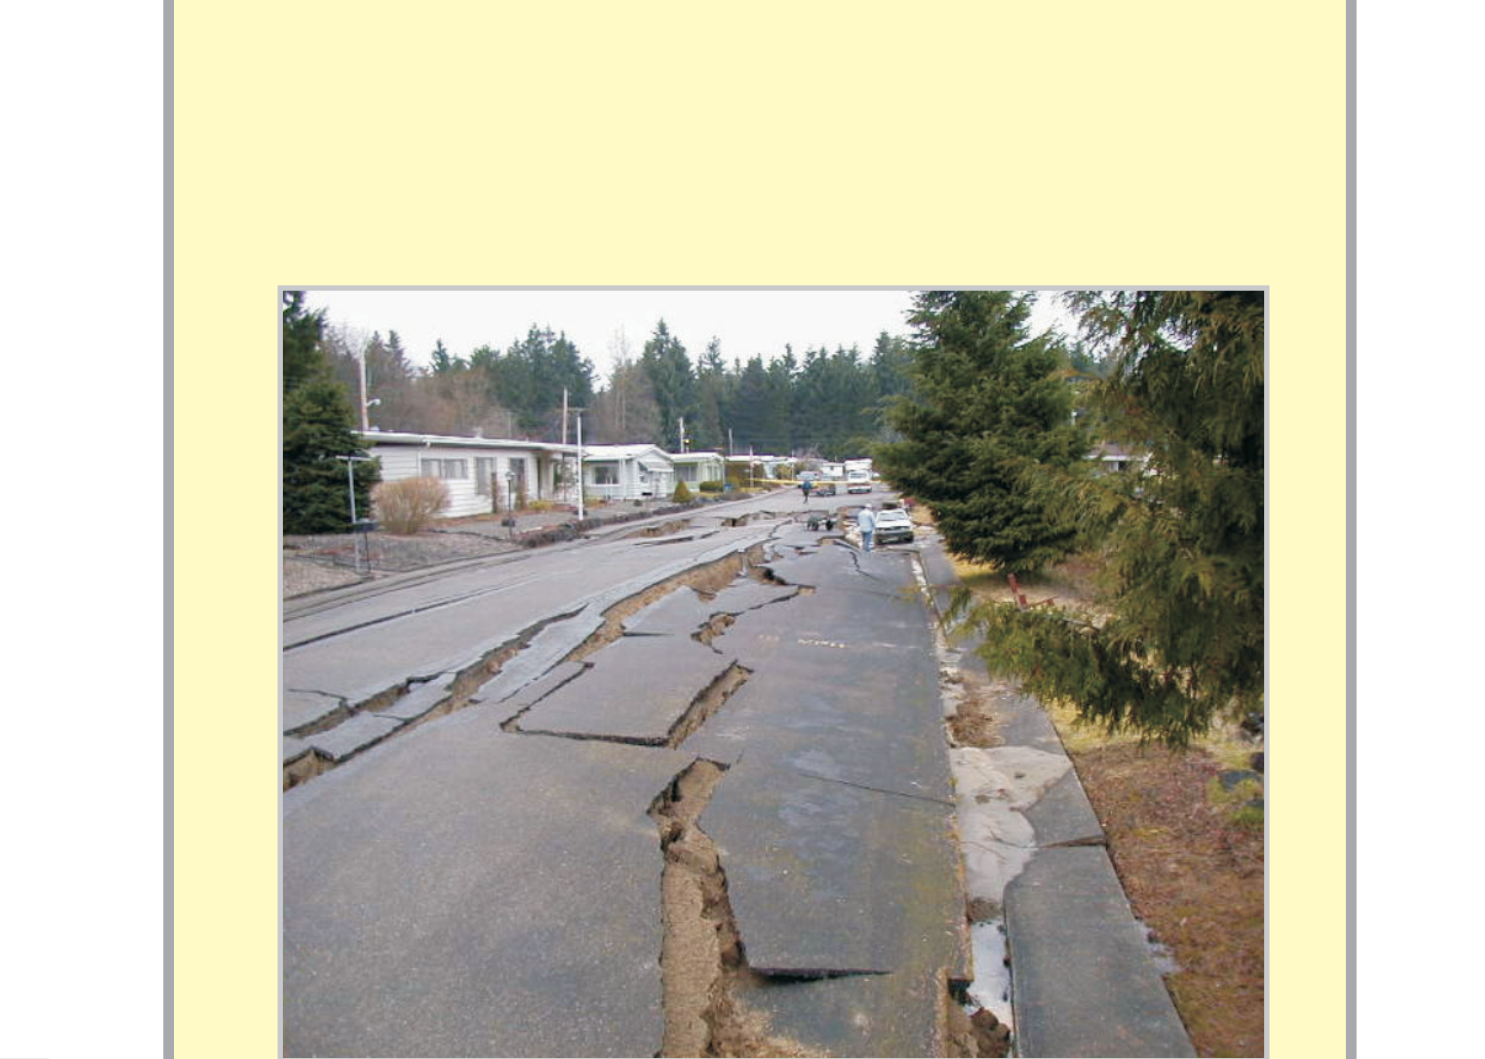


Figure 7. Road failure at Capital Lake in Olympia caused by lateral spreading during the Nisqually earthquake. (Photo courtesy of Steve Kramer, University of Washington. www.maximus.com.washington.edu).

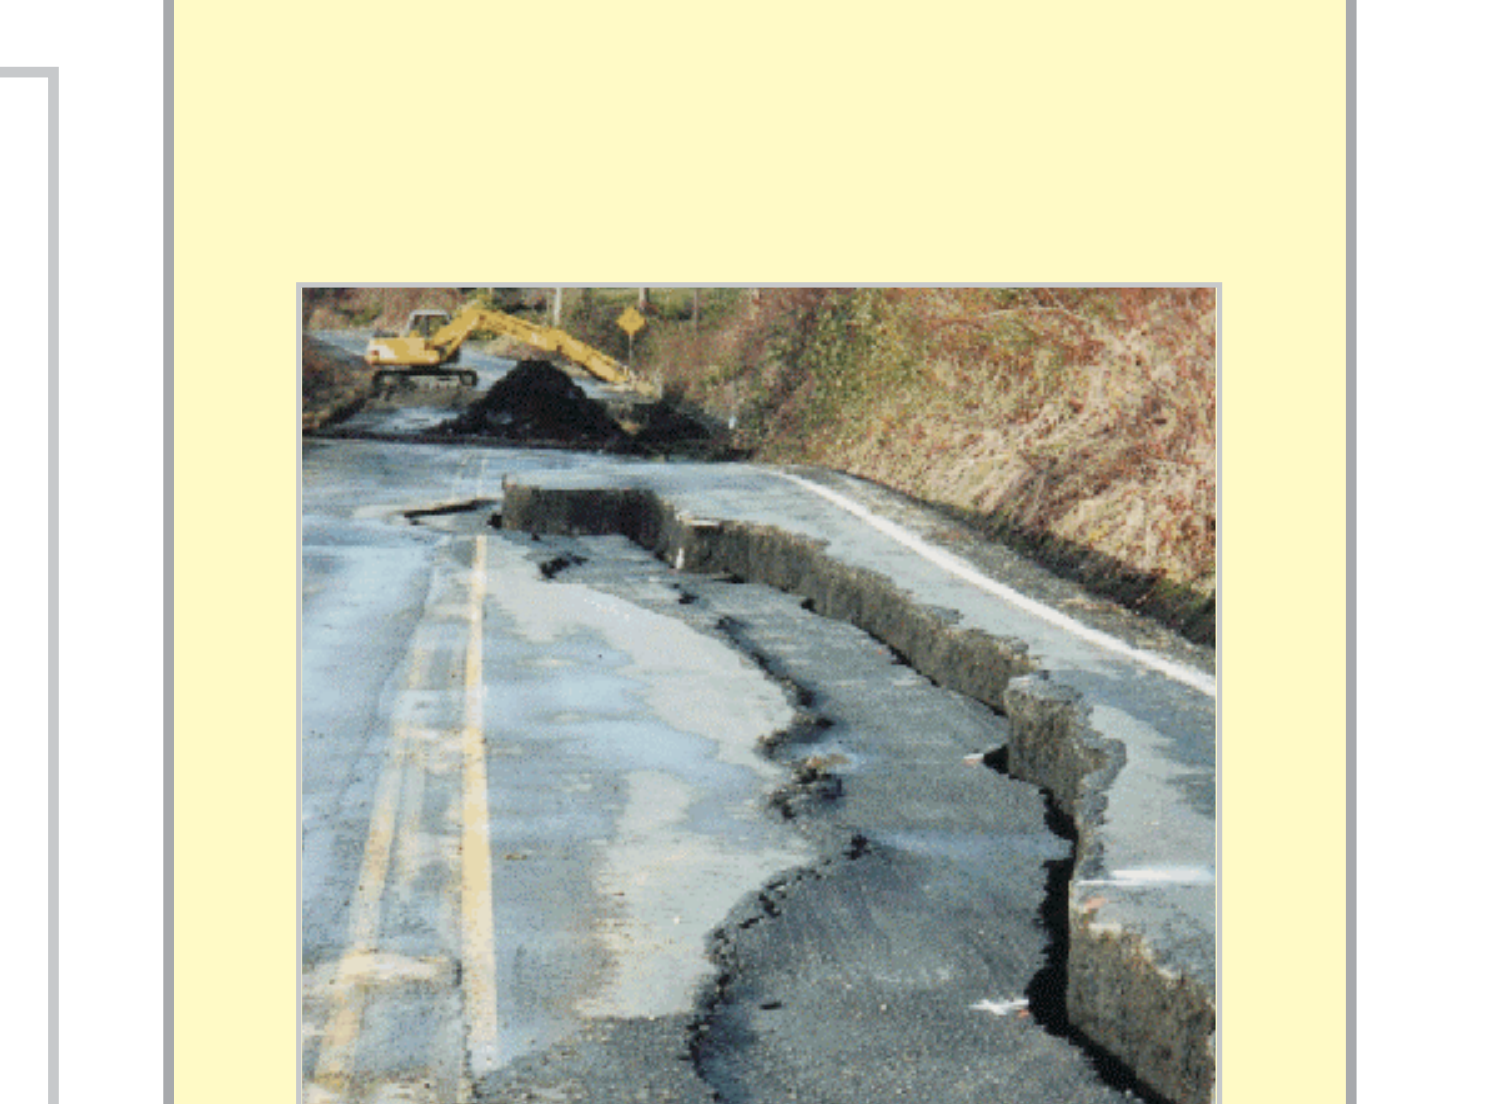


Figure 8. Road failure on Washington highway 302 caused by landslide during the Nisqually earthquake. (Ballantyne photo).

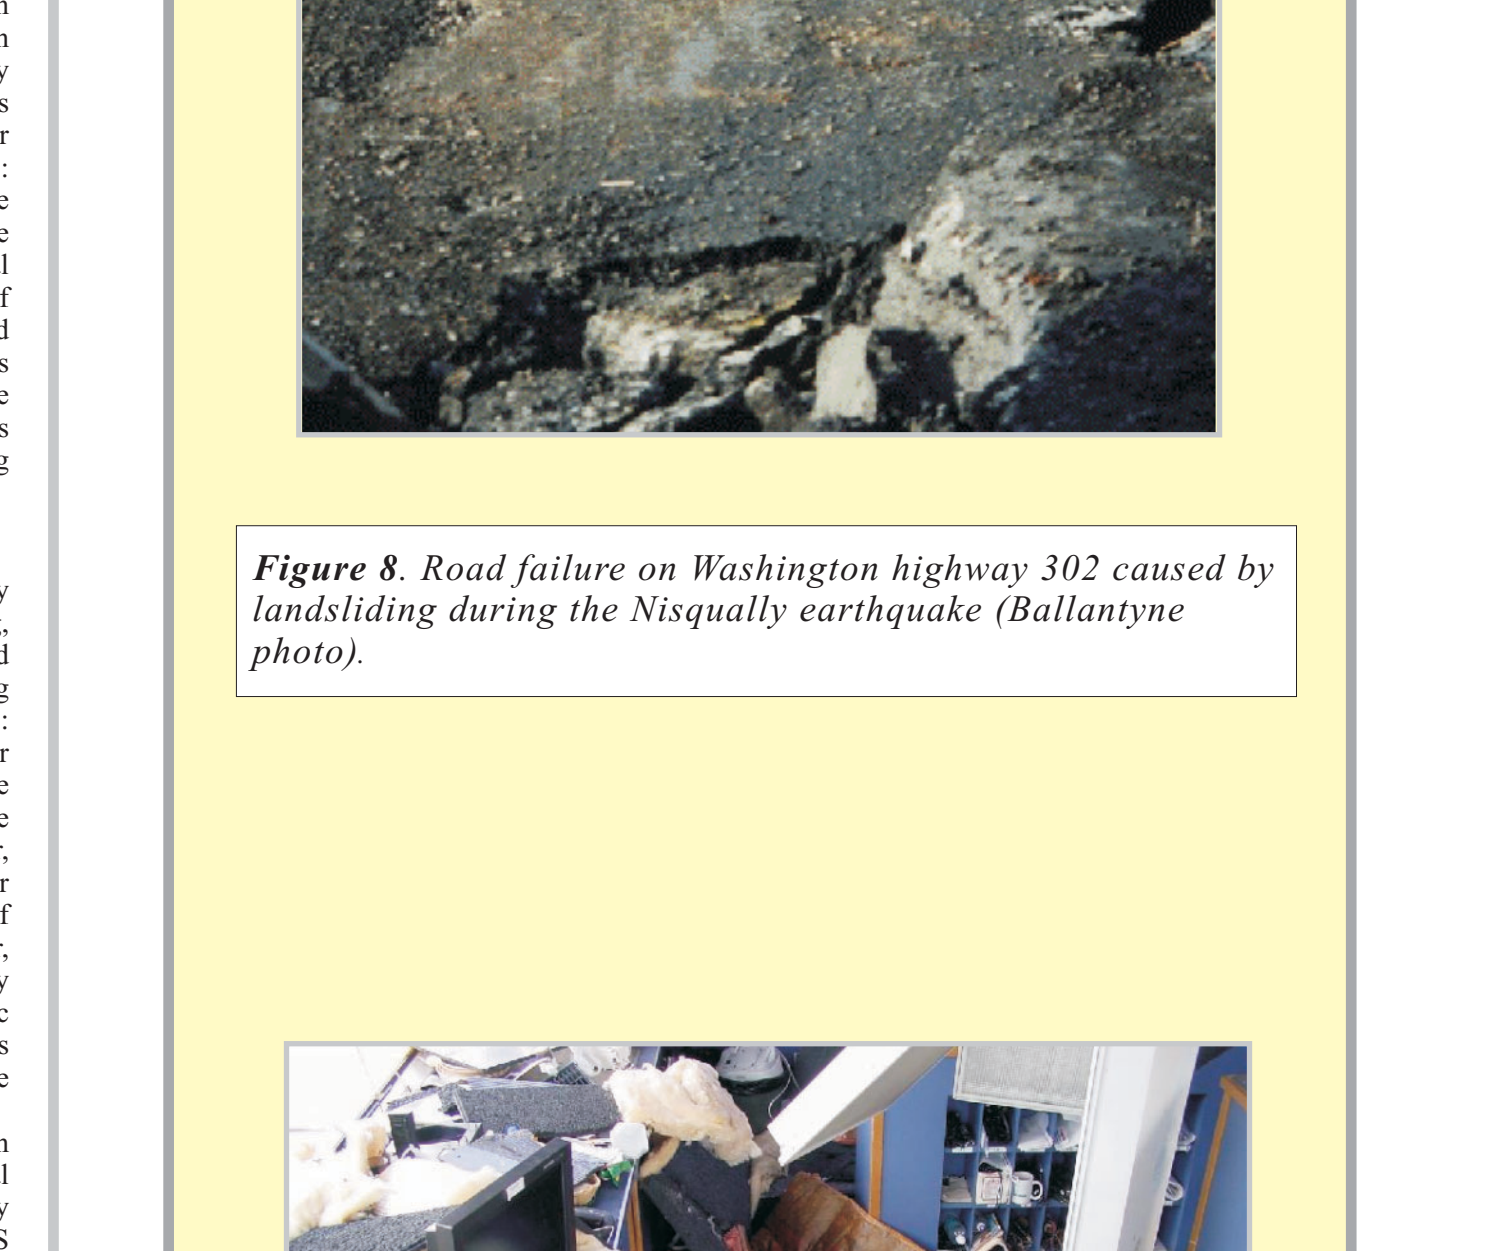


Figure 9. Control tower failure at Seattle-Tacoma International Airport during the Nisqually earthquake. No one was seriously injured by the debris. (Photo courtesy Carl Nelson, Boeing Company. www.maximus.com.washington.edu).